


# Building instructions Lounger L

Version 1.0

# Building instructions Lounger L

## Step 1:

Pre-assemble the leg-profiles (4x)






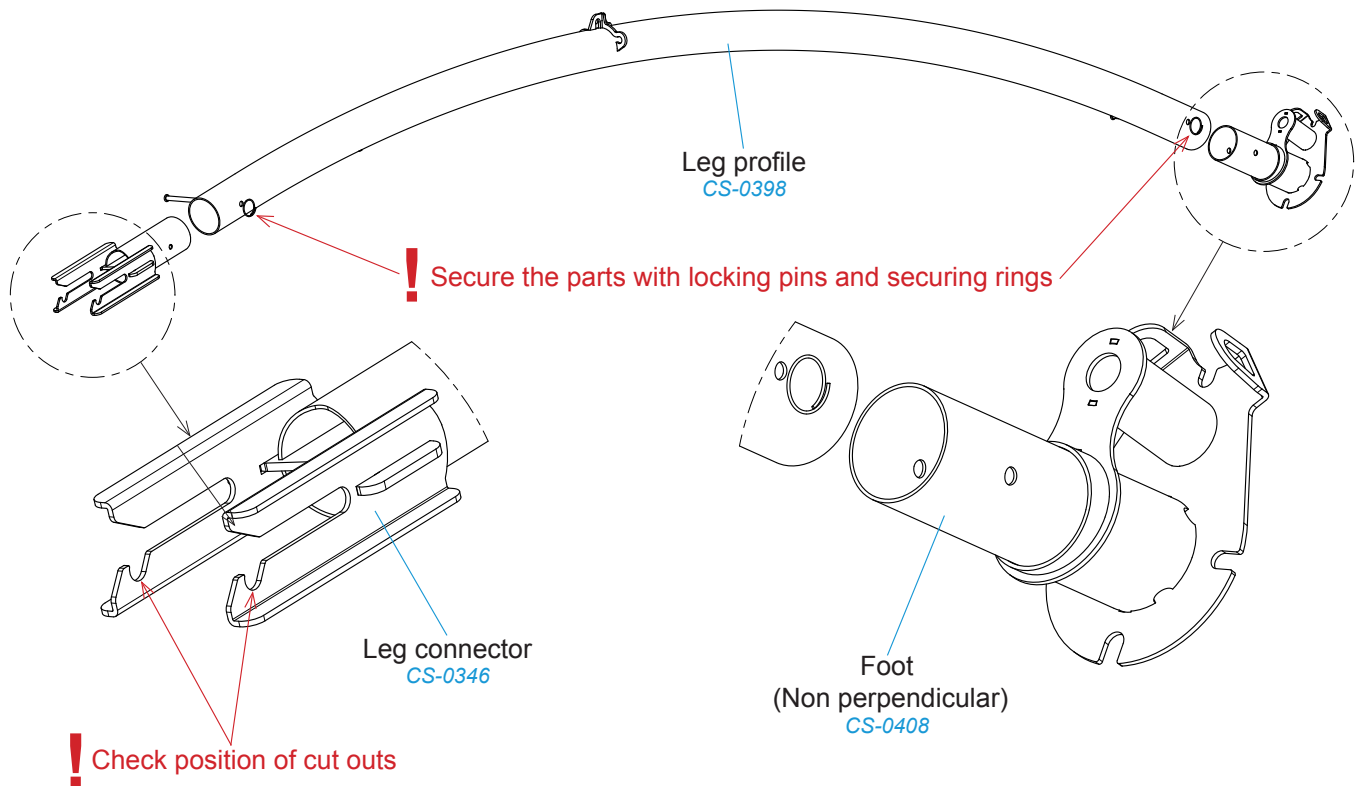


Note: On the following images the Lounger M is displayed



# Building instructions Lounger L

**Step 2:**  
Unfold the structure

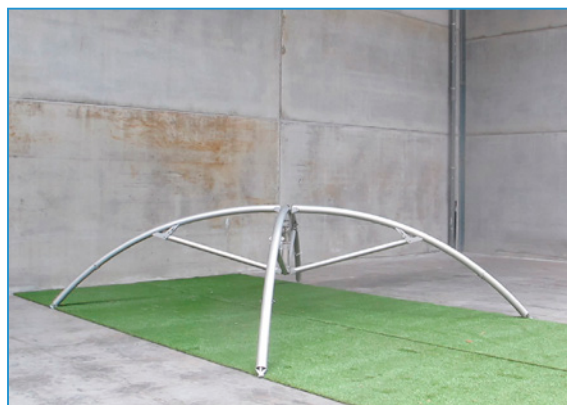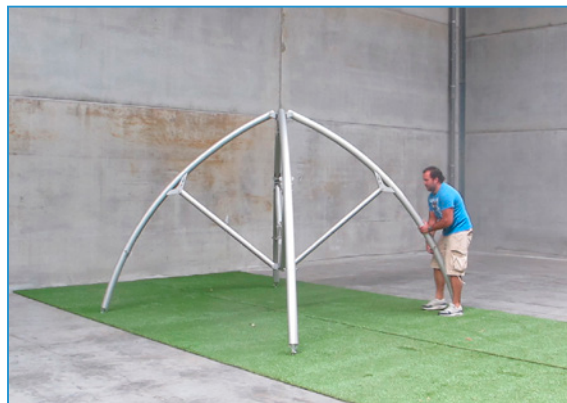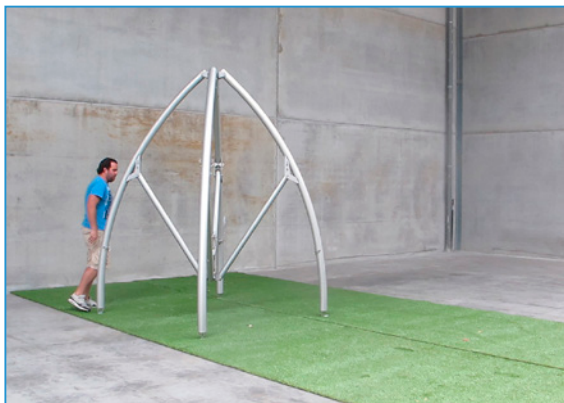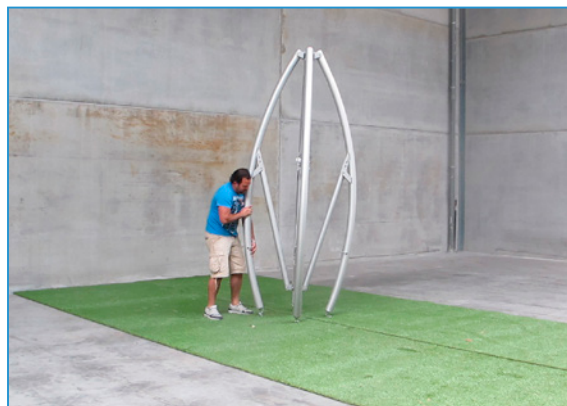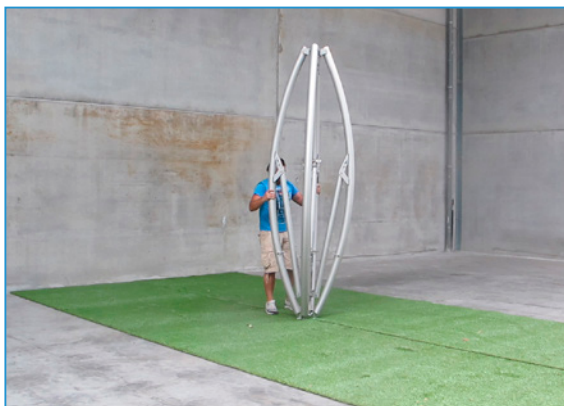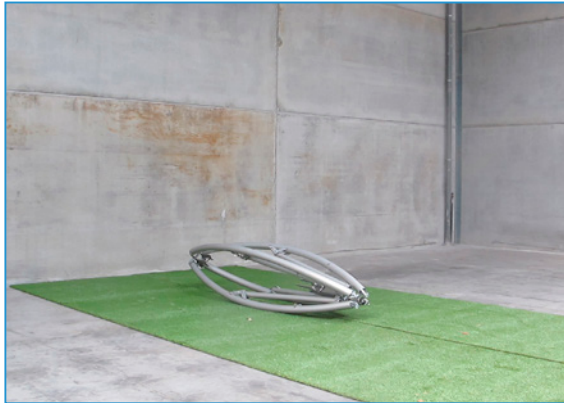

## Building instructions Lounger L

### Step 3:

Place the cover on the structure and fold back the whole unit



Align the seams of the cover with the structure



# Building instructions Lounger L


## Step 4:

Attach the inner loops of the cover to the structure ends with H-shackles

The cover has to be mounted in folded state because in that case there is no tension on the cover corners.

The final tension on the cover can be adjusted by choosing a neighbouring mounting hole.

**Be sure that all four shackles are mounted in a hole with the same number**

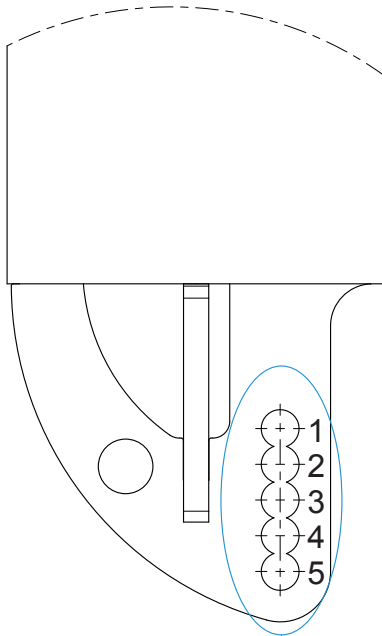

Mounting holes



H-shackle

Inner loop

The loops at the outside of the cover can be pulled downwards to make the installation easier.



Outer loop

## Building instructions Lounger L

Step 5:  
Unfold the structure



# Building instructions Lounger L

## Step 6:

Tension the cover



Unlock



Hook in



Pull the lever



## Building instructions Lounger L



Close the lever

! When it is not possible to close the lever by hand, repeat step 4 and choose a lower hole number for the H-shackles

! When the cover is not tensioned enough, repeat step 4 and choose a higher hole number for the H-shackles





# Building instructions Lounger L

## Step 7:


Connect the first end of the main cables to the cover frame (8x)



Main cable  
CS-0409

## Step 8:

Connect the first end of the tension cables to the cover frame (4x)

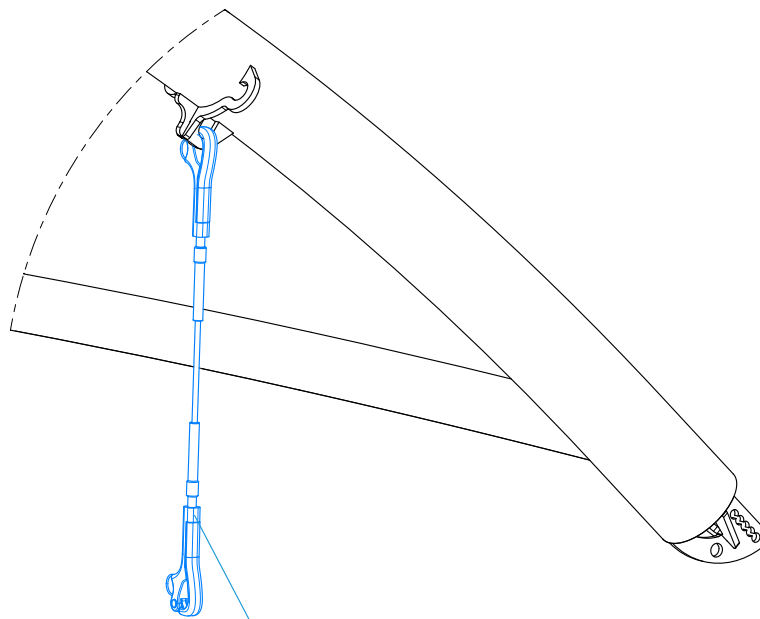

Tension cable  
CS-0410


# Building instructions Lounger L

## Step 9:


Lift the cover and mount the first leg profile



A tripod support can be used to keep up the structure and make the assembly easier

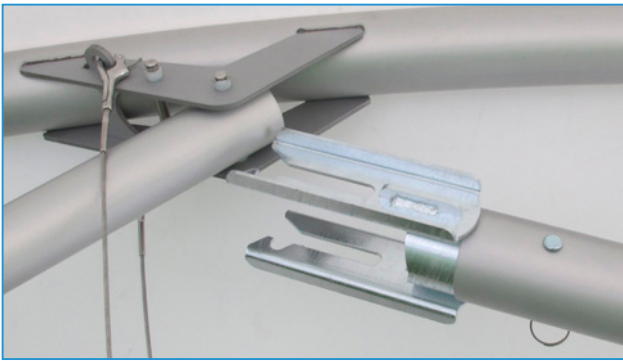


Slide the connecting fork over the two pins of the cover frame until it totally supports the lower pin

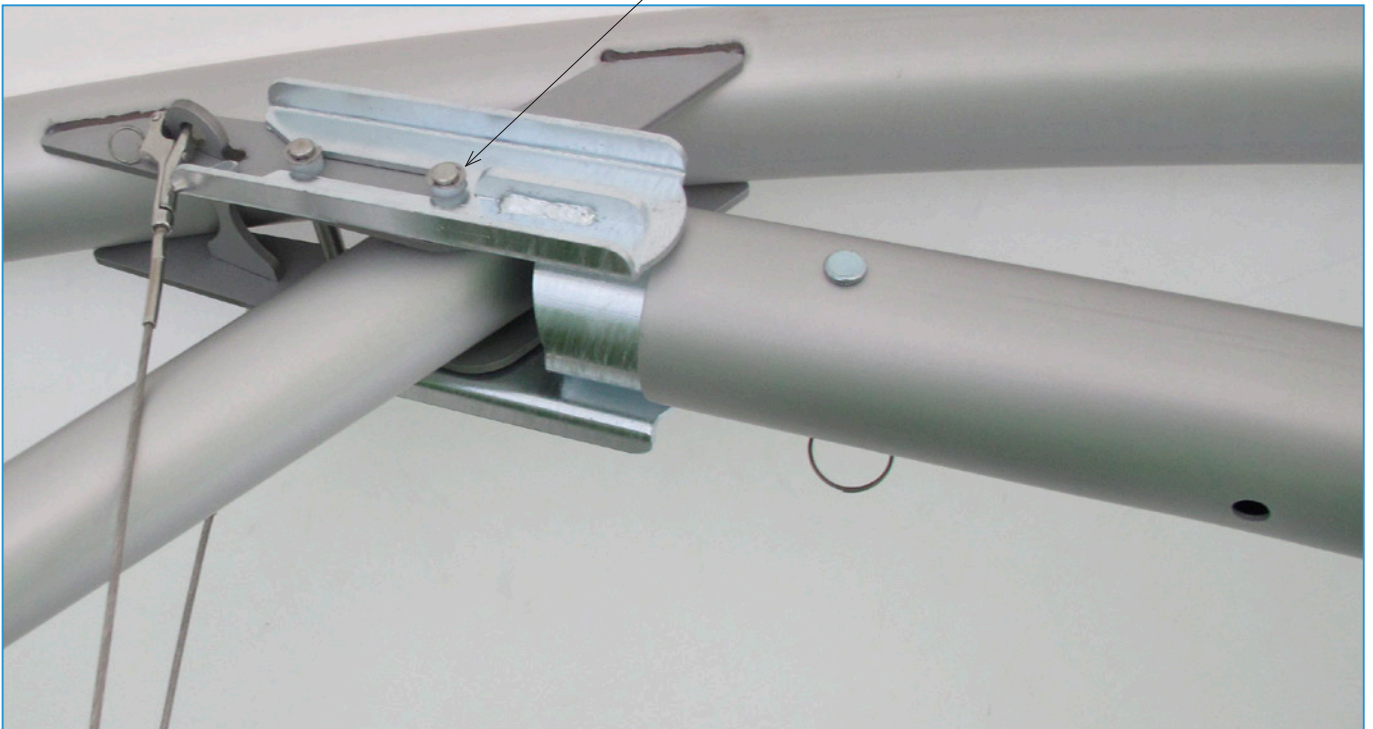

# Building instructions Lounger L

## Step 10:

Connect the second end of the two matching main cables to the leg profile

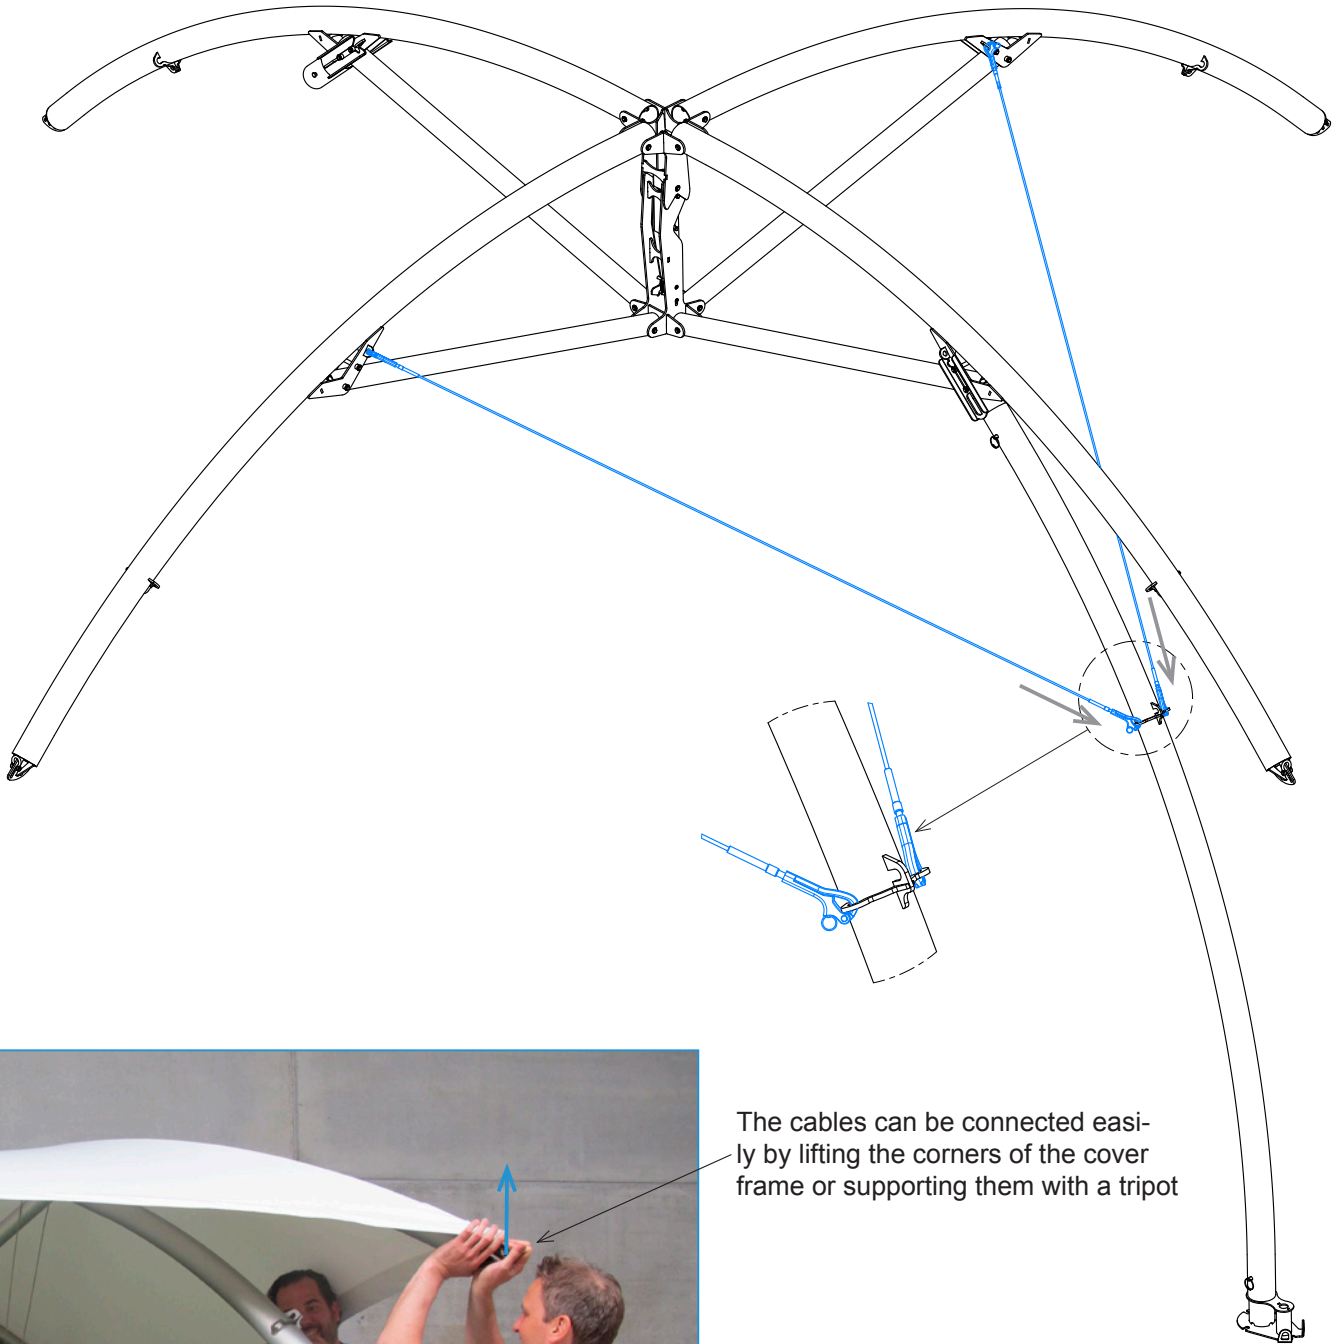

The cables can be connected easily by lifting the corners of the cover frame or supporting them with a tripod

## Building instructions Lounger L

### Step 11:

Connect the second end of the tension cable to the leg profile



The pelican hook should be closed easily. If not, extend the tension cable by turning the pelican hooks counter clockwise

# Building instructions Lounger L

## Step 12:

Repeat step 9 - 11 for the second, third and fourth leg profile



## Step 13:

Stabilize the structure by shortening the four tension cables

By tensioning the tension cables, all main cables are getting tensioned and the structure will get rigidity



## Building instructions Lounger L

### Step 14:

Anchor the structure



! For the different anchoring options and instructions see  
■ the anchoring guide

## Building instructions Lounger L

### Step 15:


Attach the connecting lashing hooks to the four side panel corners



## Building instructions Lounger L

### Step 16:

Hook in the side panel by using the two upper lashing hooks

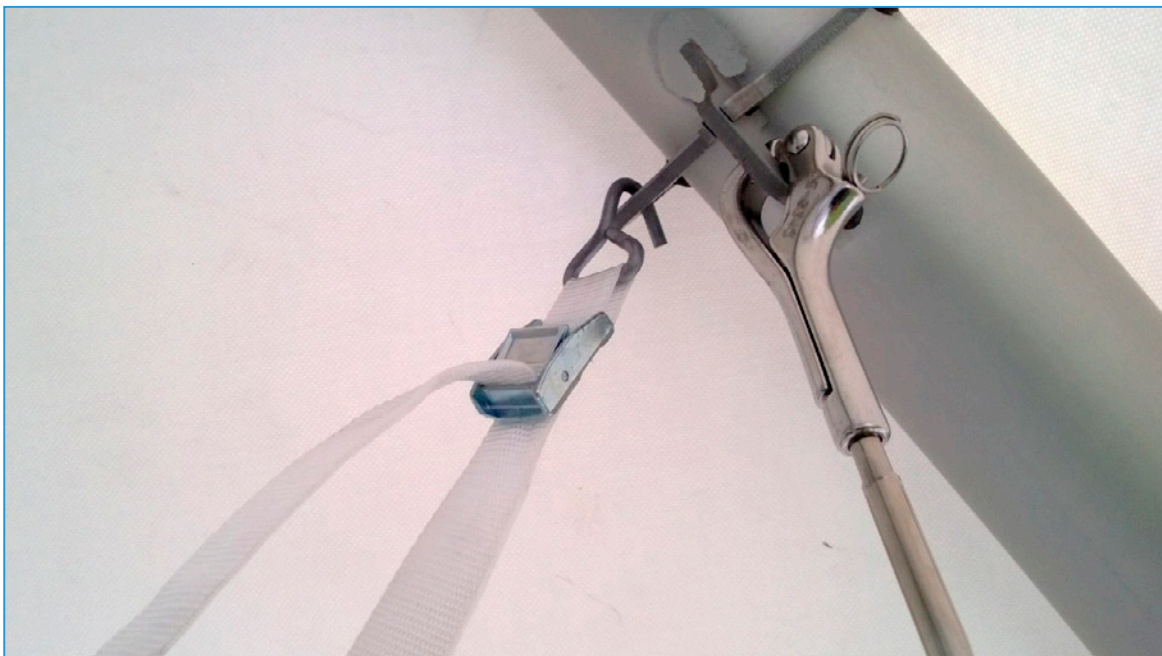




## Building instructions Lounger L

### Step 17:

Connect the two lower lashing hooks

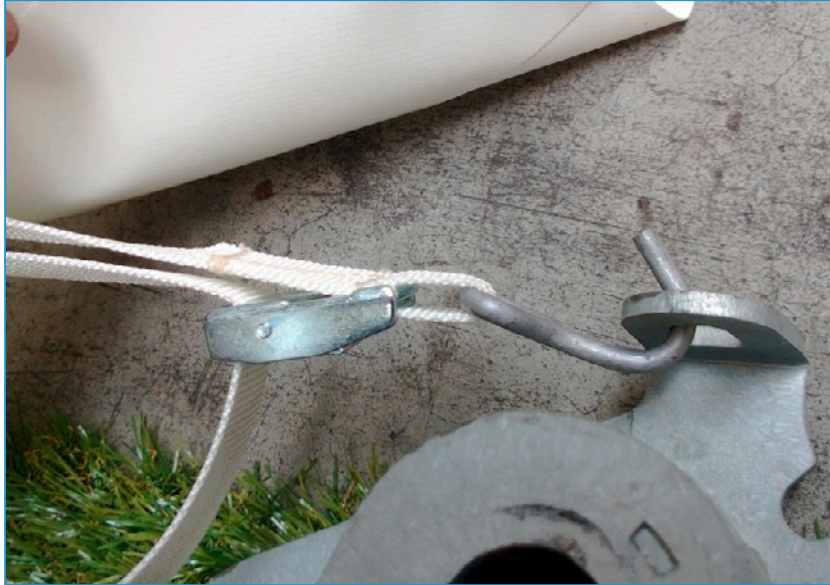

### Step 18:

Tension the side panel by tensioning the four lashing hooks



## Building instructions Lounger L

### Step 19:

Drape the upper and lower flap of the side panel to the outside of the structure



The individual side panels can be connected to each other with the zippers

# Building instructions Lounger L

## Step 19:

Install the cover connection gutter (if desired)



Connection gutter  
CS-0502

Hook in the gutter using the six hooks on the gutter




Tension the gutter with the elastic cords on both ends

# Building instructions Lounger L

## Step 20:

Install the side panel connection panel by using the zippers (if desired)

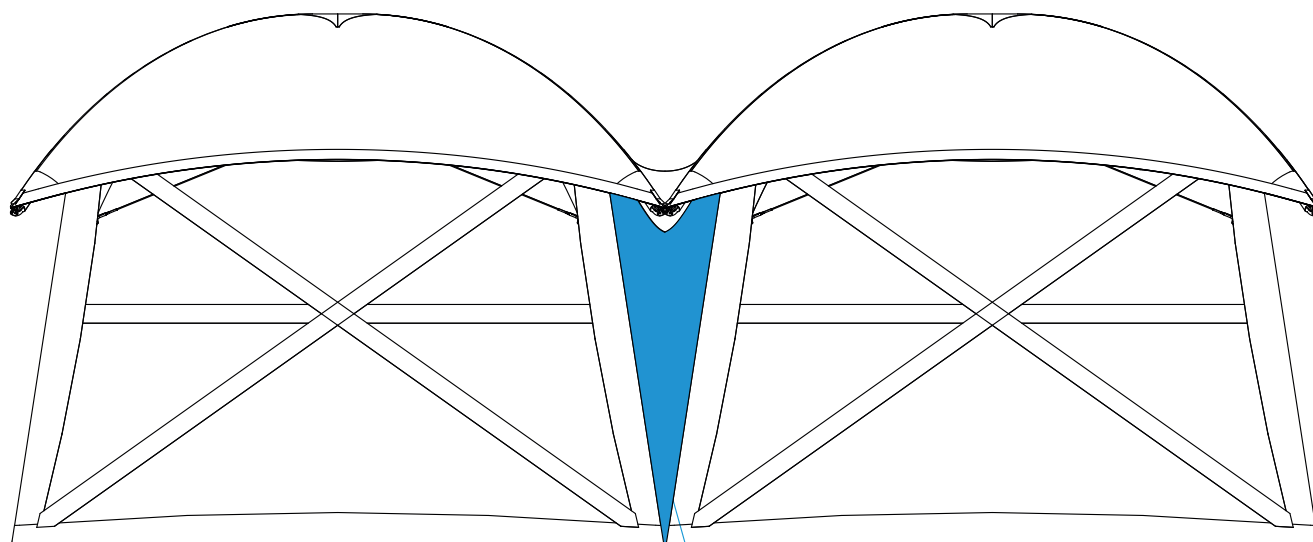

Connection panel  
CS-0503